


REJECT VALVES STAINLESS STEEL TAQP/G

LOHSE®




PA Ventiler AB

GO WITH OUR FLOW

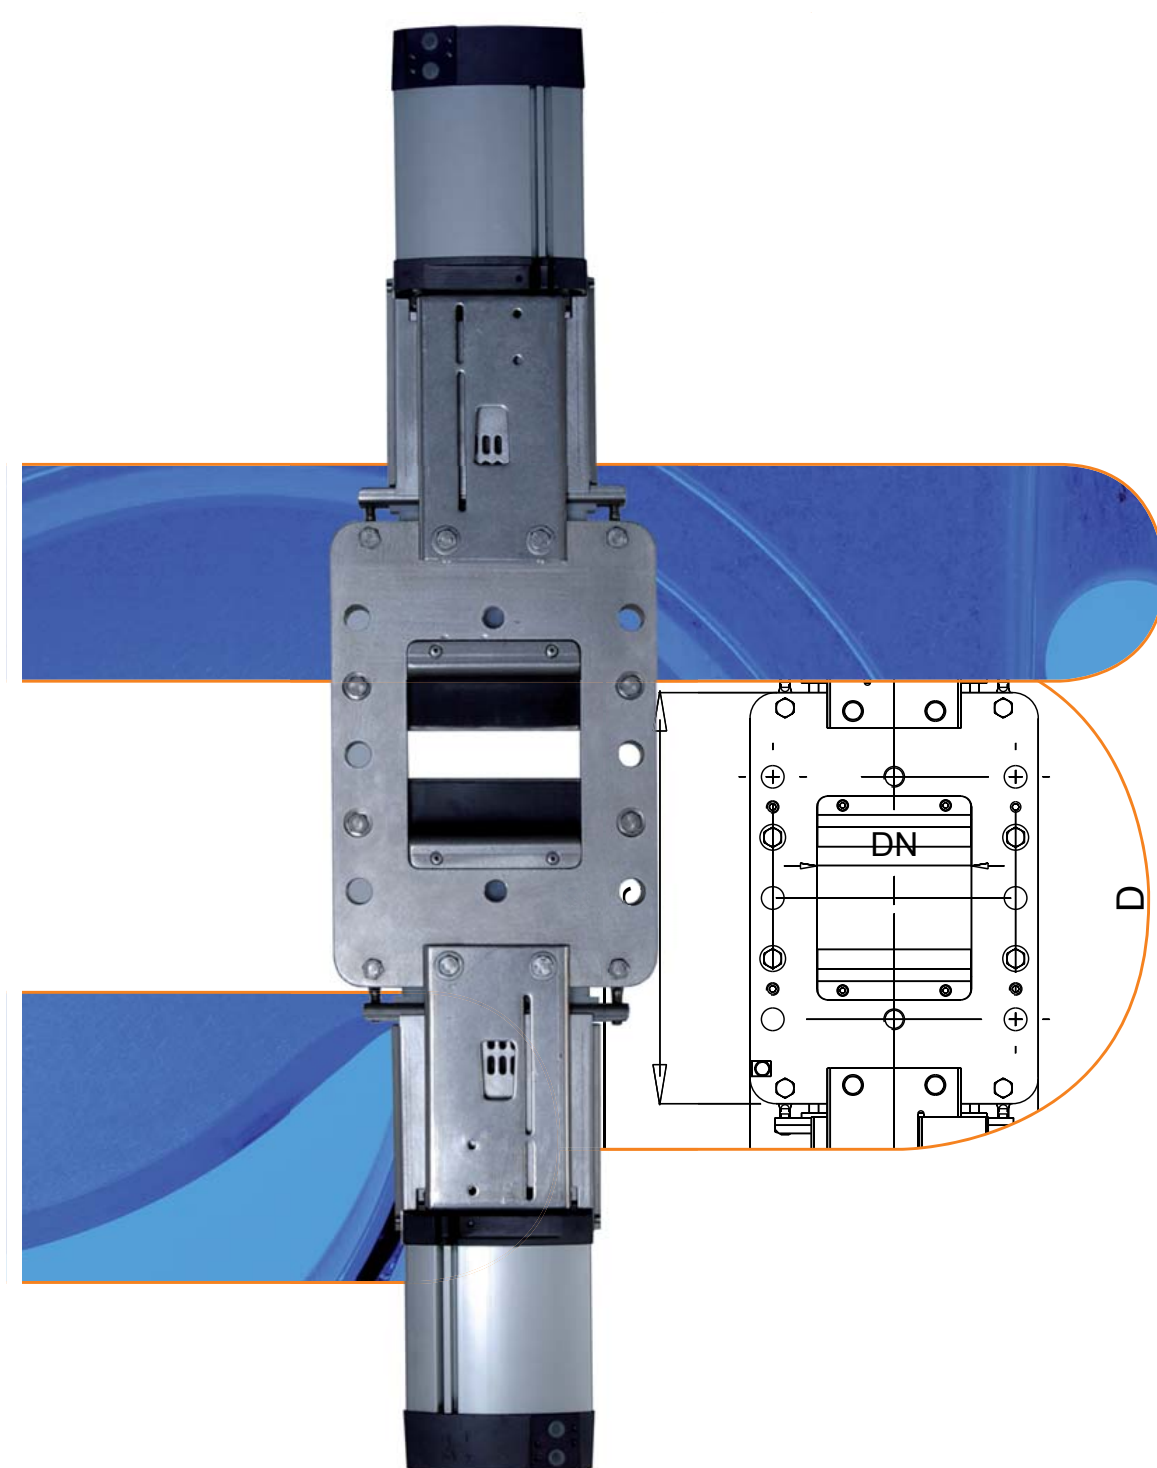

Applications




General usage

- media with reject fraction (e.g. nails and staples)
- coarse-grained media
- granulates
- powders
- temperature range to 80 °C
- see table for permitted operating pressure

Locations

- extraction devices for heavy soiling applications
- dumping and emptying devices for heavy soiling applications
- cleaning machines

Media




Materials

- housing 1.4571
- valve plate 1.4571 hardened
- slide cups


DN 150 – 400	PE-UHMW
DN 450 – 600	PP
- sealing EPDM
- rod wiper polyurethane caoutchouc
- stuffing box gland 1.4541
- bracket 1.4301
- max. operating pressure

DN 150 – 250	4 bar
DN 300 – 700	2 bar
- max. operating temperature 80° C


Flange bores for LOHSE TAQ valves according LOHSE standard




DN 150/200




DN 250/300



DN 350/400



DN 500-700

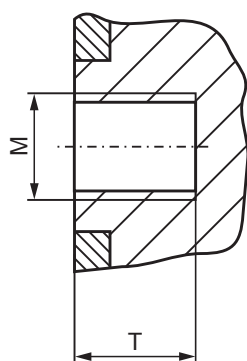


Z = total number of holes
 Z1 = number of joint-holes
 Z2 = number of through-going bores
 T = usable depth of thread

with metric tread

DN [mm]	Z	M	T [mm]	Z1	Z2	l [mm]
150	8	M20	18	2	6	118
200	8	M20	18	2	6	143
250	12	M20	18	4	8	112
300	12	M20	18	4	8	129
350	16	M20	20	6	10	110
400	16	M24	20	6	10	126.5
450	20	M24	20	8	12	112
500	20	M24	20	8	12	121
600	20	M27	23	8	12	143


Reject-valve
square
two double-acting pneumatic cylinders and protection guard

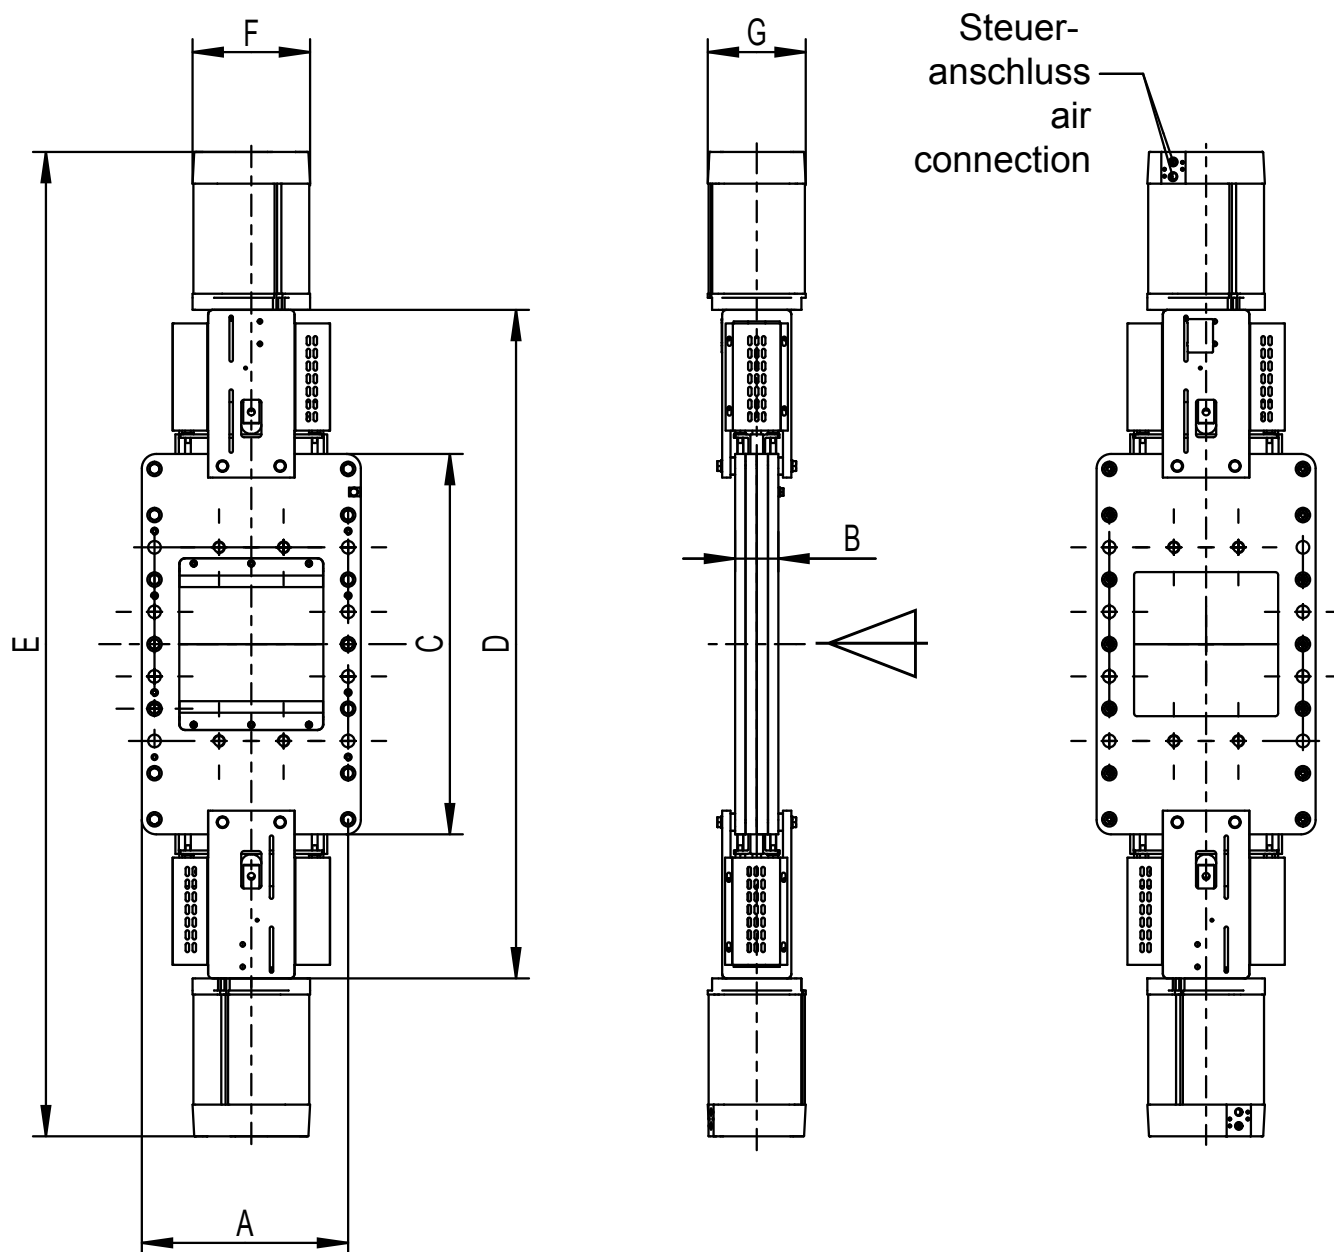

DN	BD [bar]	A	B	C	D	E	F	G	cyl Ø	air connection	weight ~[kg]
150	4	280	70	400	750	1185	165	135	125	G 1/4"	56.9
200	4	330	70	540	980	1472	204	170	160	G 1/4"	93.2
250	4	380	75	660	1214	1708	204	170	160	G 1/4"	123
300	2	430	75	780	1330	1974	244	211	200	G 1/2"	164

Dimensions in mm, flange bores on request; air connection acc. VDI/VDE 3845 (NAMUR).
Further sizes on request.

Reject-valve
square
two double-acting pneumatic cylinders and protection guard

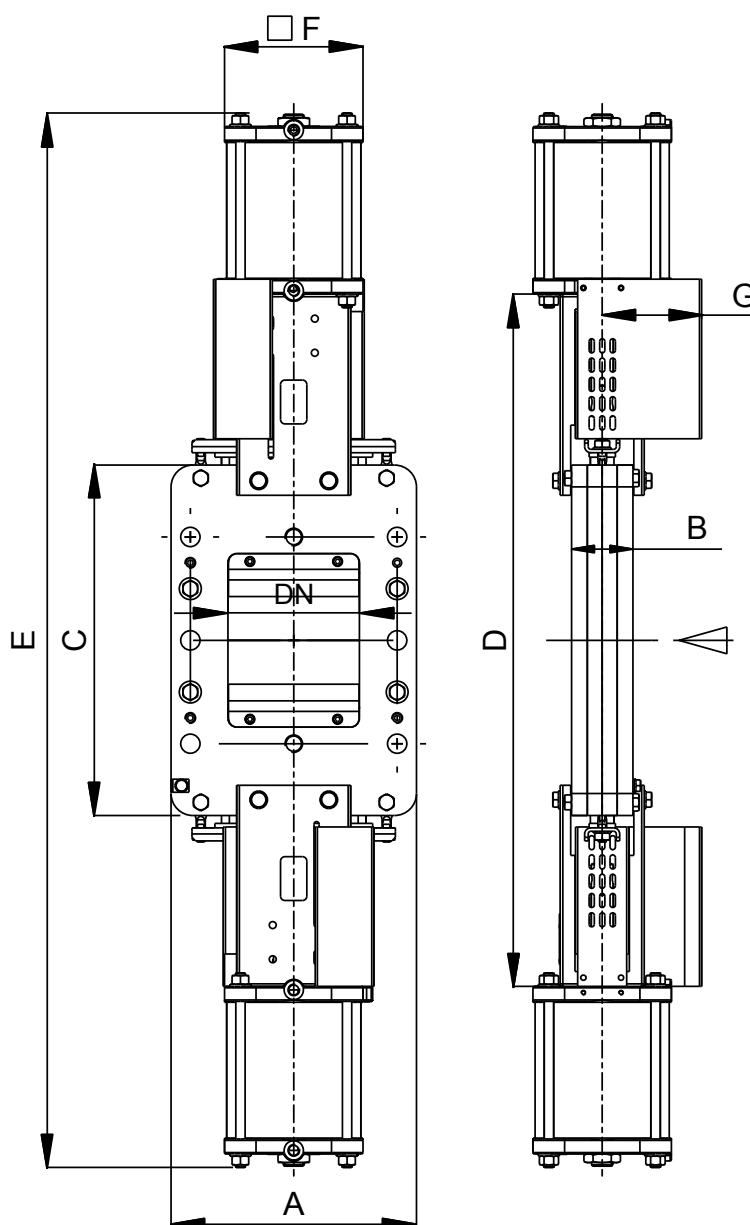

DN	BD [bar]	A	B	C	D	E	F	G	cyl Ø	air connection	weight ~[kg]
350	2	490	92	910	1552	2255	246	246	230	G 1/2"	219
400	2	550	92	1000	1810	2596	318	318	300	G 1/2"	320
450	2	600	95	1150	2030	2830	318	318	300	G 1/2"	464
500	2	650	96	1280	2220	3110	318	318	300	G 1/2"	610
600	2	770	120	1530	2590	3580	318	318	300	G 1/2"	1202

Dimensions in mm, flange bores on request.
Further sizes on request.