

STRAINER

CR 3203

Ref. : CR 3203 pas

Rev. : Initial

Date : 22/10/2013



PA Ventil AB

GO WITH OUR FLOW

APPLICATION

General use : for all common fluids.

GENERAL CHARACTERISTICS

From DN3/8" to DN 4".
Nylon threaded male BSP.
Stainless steel mesh.


CONSTRUCTION

2	Mesh	Stainless steel 304
1	Threaded	Nylon
Pos.	Description	Material



DIMENSIONS

DN		H	ØA	Mesh	Weight (kg)
mm	inch				
10	3/8"	49	24	1,2	0,008
15	1/2"	50	28	1,2	0,010
20	3/4"	57	32	1,2	0,017
25	1"	63	41	1,2	0,025
32	1"1/4	68	50	1,2	0,034
40	1"1/2	79	55	1,2	0,042
50	2"	95	67	1,2	0,064
65	2"1/2	96	86	1,5	0,095
80	3"	113	99	1,5	0,13
100	4"	128	122	2,0	0,168

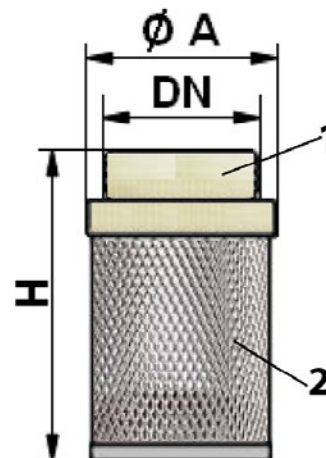

WORKING CONDITIONS

Maximum working temperature : -10°C / +110°C

STANDARDS

Fabrication according to ISO 9001 :2000
Threaded male BSP cylindrical end according to ISO 228-1.



The photographs and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice.