

# FLANGED TYPE LIFT CHECK VALVE

## CS 5261

Ref. : CS 5261.pas

Rev. : Initial

Date : 02/09/2016



PA Ventil AB

GO WITH OUR FLOW

### APPLICATION

General use : hot and cold water plants, steam plants, industrial technologies, neutral fluids, heat and refrigerating engineering.


### GENERAL CHARACTERISTICS

Range : from DN 15 to DN 200  
 Extremely reliable.  
 Wide range of applications.  
 Simple and sturdy construction.  
 Reliable and efficient functioning.  
 Mounting in all positions.



### CONSTRUCTION


8	Bolt	8.8 A2A	
7	Spring	Stainless Steel	X17CrNi16-2
6	Gasket	Graphite	CrNi
5	Stem	Stainless Steel	X20Cr13
4	Seal ring	Stainless Steel	X20Cr13
3	Disc	Stainless Steel	X20Cr13
2	Cover	Steel	GP240GH
1	Body	Steel	GP240GH
<b>Pos.</b>	<b>Description</b>	<b>Material</b>	

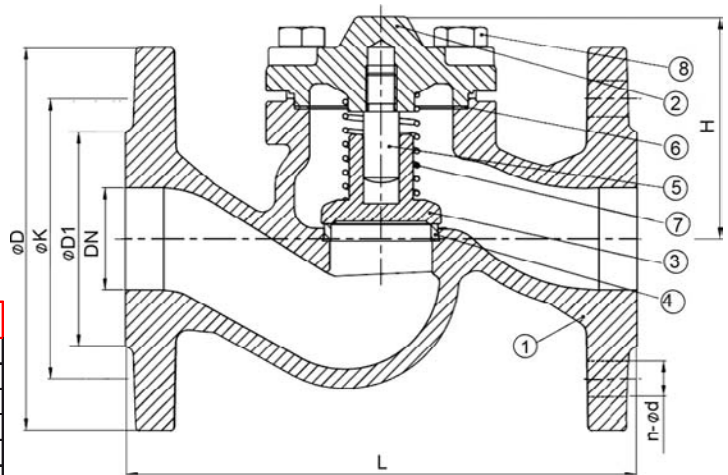

### DIMENSIONS

DN	15	20	25	32	40	50	65	80	100	125	150	200
<b>L</b>	130	150	160	180	200	230	290	310	350	400	480	600
<b>H</b>	75	75	75	91	91	124	125	175	176	260	260	270
<b>D</b>	95	105	115	140	150	165	185	200	235	270	300	375
<b>ØK</b>	65	75	85	100	110	125	145	160	190	220	250	320
<b>n</b>	4	4	4	4	4	4	8	8	8	8	8	12
<b>ØM</b>	14	14	14	18	18	18	18	18	22	26	26	30
<b>Weight (kg)</b>	3,5	4,5	5,5	8	11	14	23	30	47	70	96	100

### WORKING CONDITIONS

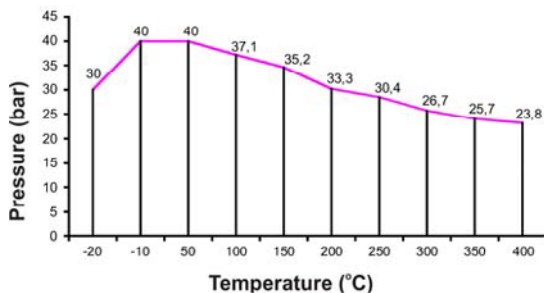

Test procedures are established according to standard NF EN 12266-1, DIN 3230, ISO 5208.

### AGREEMENT AND STANDARDS

Face to face according to standards NF EN 558-1 serie 1, DIN 3202/1 serie F1.  
 Flanges drilled according to standard ISO PN40 EN 1092-1.



The photographs and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice.